



BLINDSGALORE AMERICA SERIES ROLLER SHADES INSTRUCTIONS SPRING ROLLER (OUTSIDE MOUNT)

The roller shade, when mounted should not make contact with the top of the window frame or any other obstruction when raised and lowered. Position the mounting brackets outside the window frame. The brackets need to be aligned and level with one another. When the shade is installed it should move freely between the brackets, be sure to allow 1/8" of additional space between the brackets so the mechanism will rotate freely.

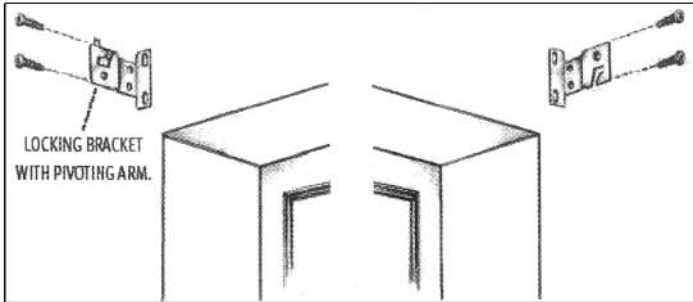

**SPRING ROLLER - STANDARD ROLL
RR641***

Attach the mounting brackets to the wall or window frame with the locking bracket on the left. These brackets can be used for ceiling applications by rotating the foot of the brackets to the top.

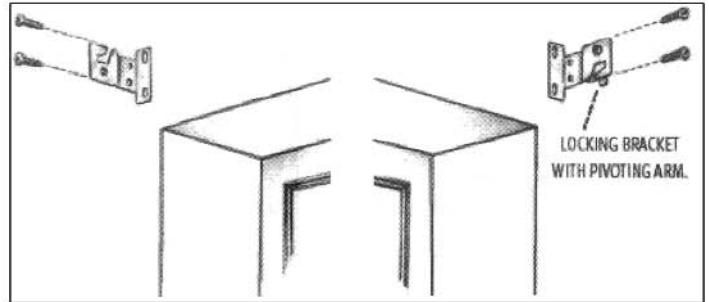


**SPRING ROLLER - REVERSE ROLL
RR641***

Attach the mounting brackets to the wall or window frame with the locking bracket on the right. These brackets can be used for ceiling applications by rotating the foot of the brackets to the top.


* Shade with large diameter rolls will receive an extended version of this bracket (RR642)

BLINDSGALORE AMERICA SERIES ROLLER SHADES INSTRUCTIONS SPRING ROLLER (INSIDE MOUNT)

The roller shade, when mounted should not make contact with the top of the window frame or any other obstruction when raised and lowered. Position the mounting brackets inside the window frame. The brackets need to be aligned and level with one another. When the shade is installed it should move freely between the brackets.

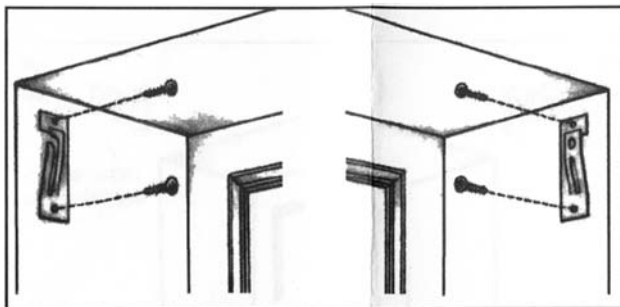


**SPRING ROLLER - STANDARD ROLL
BRACKET #163L**



Left Side

Diagram B >>

Faces Window



Right Side

**SPRING ROLLER - REVERSE ROLL
BRACKET #163L**

For Standard roll shades, install the slotted bracket on the left side of the window frame and the bracket with the round hole on the right.

For Reverse roll shades, install the pin side of the bracket on the left side of the window casement (Diagram A). Install the slot side of the bracket on the right side of the window casement (the opening to the slot will face your window (Diagram B)). To install the shade, insert the pin into the left side of the bracket. tilt the flat end of the shade behind the right bracket towards the window. Bring the shade forward towards the window. Bring the shade forward towards the room and slide the flat end into the slot. If you do not have enough room to install the shade, please call our customer service department at 1-877-70-BLIND and order bracket #RR641.